

# Connecting relay AR 101 for ZB - telephone



The connecting relay transmits ringing signals to any signal devices. Due to the potential-free connection, alternating current signal devices as well as direct current signal devices with their own current supply can be operated in the rhythm of the telephone ringing.

## Possible application areas:

- railways
- mountain railways / funicular railways / ski-lifts
- industry
- military engineering
- rescue
- security

## Features:

- potential-free connection of direct current and alternating current devices

## Technical data:

### Input side:

ringing voltage

### Output side:

switching current  
switching voltage  
switching output

electric safety  
ambient temperature  
material  
type of protection housing  
weight  
colour

## Part no.:

60602: AR 101 in damp room box  
60603: AR 101 in frame for C-rail



## Applications:

- in damp rooms
- in protected places in the outdoor area
- in indoor rooms
- in control cabinets

24 V =

6 A / 250 Vac oder 6 A / 30 Vdc  
max. 400 VAC oder 150 VDC  
150 W oder 150 VA

= EN 60950 (sealed-in)  
- 20 ... + 50 °C  
Thermoplastic  
IP 54  
200 g  
light grey, RAL 7035

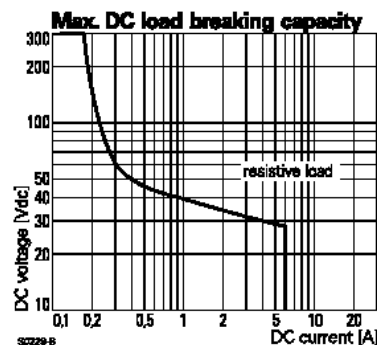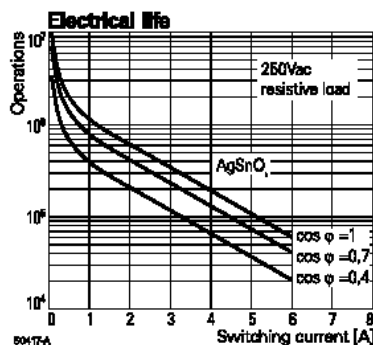

signaltechniksprengergmbh

Zum Kugelfang 24  
D - 95119 Naila  
Deutschland  
phone +49 92 82 / 9638-400  
fax +49 92 82 / 9638-430  
e-mail: info@sts-sprenger.de  
www.sts-sprenger.de